

Tahiti wall hung gas boiler




- Technical characteristics
 Single main heat exchanger
- Maximum flue length 4mtrs
- Three speed circulating pump
- 8 litre expansion vessel
- Built in flames safety and modulation
- Selector for standby, winter, summer, anti-freeze and reset modes
- LED boiler water thermostat
- Operating indication lights for power on, and heating requests
- Chimney sweep function
- Case with hinging front door

Fondital Tahiti gas wall hung boiler series


Fondital introduces the new RTFS wall mounted Tahiti boiler. This boiler is built using the latest technology and is developed to meet the user, installer, and maintenance technicians needs.


The user is guaranteed a high quality, high performance, low consumption product that is easy to use and safe throughout its working life. The installer will find that this product is very easy to install and that it meets all his expectations in terms of reliabilty.

Easy access and well designed layout of the components ensure quick and easy maintenance.

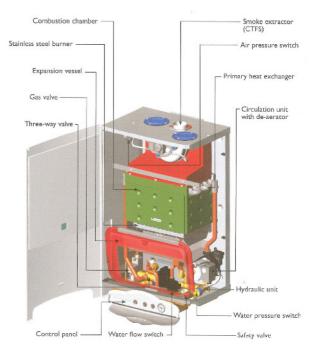

	units	GBTR24	GBTR28
Maximum heat output	kW	23.8	28.3
Minimum heat output	kW	9.9	H
Efficiency @ normal	%	93.2	92.2
Efficiency @ 30%	%	90.2	87.6
LPG consumption	kg/h	1.98	2.38
Natural gas consumption	m³/h	2.7	3.25
Electrical consumption	watts	130	150
Expansion vessel size	- 1	8	8
Weight	kg	38	38





CHAMPION HEATING LTD P O BOX 511, WHANGAPARAOA AUCKLAND

TE: 09 4240424 FAX: 09 424 0464