




Performance Plus 8GU25i-3

SPECIFICATION

Heating output	25 kW
Power input	6.4 kW
Power supply	Three phase + neutral and earth
Required circuit breaker	25 A, 3 pole D curve
Nominal compressor run current	13 A per phase
Fan full load current	2.8 A
Recommended flow rate	2.5 litre / second
Water connections	25 mm BSP female
Dimensions, L × W × H	1305 × 460 × 1800 mm
Weight	214 kg
Sound pressure level, high	56 / 59 dB(A) at 3 m
Heating output basis	8 °C wet bulb and 38 °C water temperature
Installation	Outdoor only — not suitable for indoor or plant-room installation without air-quality monitoring and ventilation
Warranty	2 years parts and labour — compressor, evaporator coil, heat exchanger and refrigeration system
Manufacturer	Hot Water Heatpumps Ltd

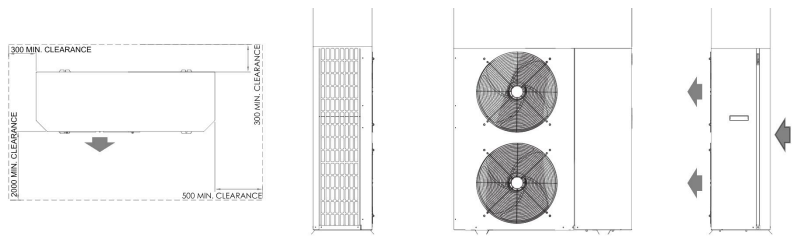

Installation clearances and unit views, dimensions in millimetres

CHAMPION HEATING LTD

Auckland hydronic and pool heating specialists.

Figures are manufacturer data and subject to change without notice. Champion Heating Ltd is an independent supplier and installer; brand names identify the products we supply.

0800 HEAT 4 U

0800 432 848 · 09 424 0424

info@championheating.co.nz · championheating.co.nz