




Performance Plus 8GU28-3

SPECIFICATION

Heating output	28 kW
Power input	7.0 kW
Power supply	Three phase + neutral and earth
Required circuit breaker	32 A, 3 pole D curve
Nominal compressor run current	14.7 A per phase
Fan full load current	1.0 A
Minimum flow rate	4.2 litre / second
Recommended flow rate	2.0 litre / second
Water connections	Application Specific
Dimensions, L × W × H	1711 × 767 × 1391 mm
Weight	245 kg
Sound pressure level, high	66 dB(A) at 3 m
Heating output basis	8 °C wet bulb and 38 °C water temperature
Warranty	2 years parts and labour — compressor, evaporator coil, heat exchanger and refrigeration system
Manufacturer	Hot Water Heatpumps Ltd

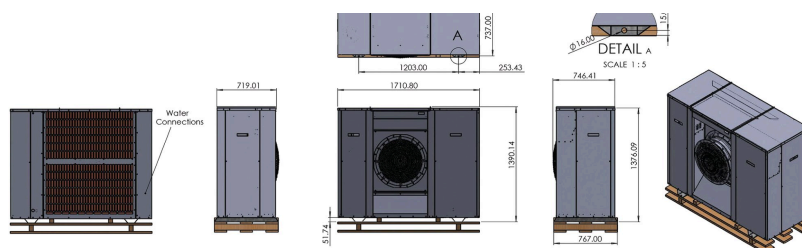

Installation clearances and unit views, dimensions in millimetres

CHAMPION HEATING LTD

Auckland hydronic and pool heating specialists.

Figures are manufacturer data and subject to change without notice. Champion Heating Ltd is an independent supplier and installer; brand names identify the products we supply.

0800 HEAT 4 U

0800 432 848 · 09 424 0424

info@championheating.co.nz · championheating.co.nz