




Performance Plus 8GUb17i-3

SPECIFICATION

Heating output	17 kW
Power input	4.8 kW
Power supply	Three phase + N & E
Required circuit breaker	20 A, D curve
Nominal compressor run current	7.8/Phase A
Fan full load current	1.4 A
Recommended flow rate	1.2 litre / second
Water connections	25 mm BSP
Dimensions, L × W × H	1130 × 425 × 1380 mm (dual purpose dimensions may vary)
Weight	157 kg
Sound pressure level, high	53 / 56 dB(A) at 3 m
Buffer tank	Yes
Circulation pump	Yes
Heating output basis	8 °C wet bulb and 38 °C water temperature
System type	Open vented — not suitable for pressurised systems
Warranty	2 years parts and labour — compressor, evaporator coil, heat exchanger and refrigeration system
Manufacturer	Hot Water Heatpumps Ltd

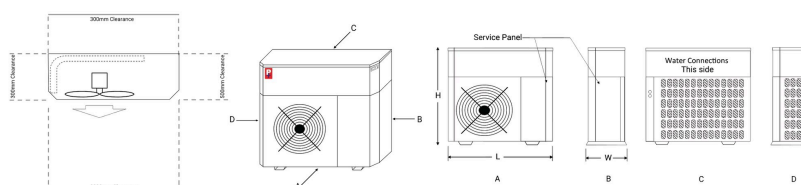

Installation clearances and unit views, dimensions in millimetres

CHAMPION HEATING LTD

Auckland hydronic and pool heating specialists.

Figures are manufacturer data and subject to change without notice. Champion Heating Ltd is an independent supplier and installer; brand names identify the products we supply.

0800 HEAT 4 U

0800 432 848 · 09 424 0424

info@championheating.co.nz · championheating.co.nz