




Dual Purpose 7GUb18D15-3

SPECIFICATION

Underfloor heating output	18 kW
Flow rate	1.2 litre / second
Water connections	25 mm BSP female
Hot water heating output	15 kW
Power input	5.0 kW
Power supply	Three phase + neutral and earth
Required circuit breaker	25 A, 3 pole D curve
Nominal compressor run current	7.8 A per phase
Fan full load current	0.9 (x2) A
Dimensions, L × W × H	1450 × 500 × 1495 mm
Weight	195 kg
Sound pressure level, high	54 / 55 dB(A) at 3 m
Underfloor heating output basis	8 °C wet bulb and 38 °C water temperature
Hot water heating output basis	8 °C wet bulb heating from 15 °C to 55 °C
Warranty	2 years parts and labour — compressor, evaporator coil, heat exchanger and refrigeration system
Manufacturer	Hot Water Heatpumps Ltd

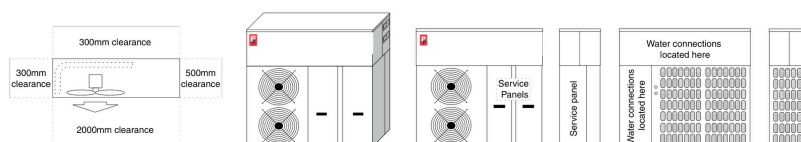

Installation clearances and unit views, dimensions in millimetres

CHAMPION HEATING LTD

Auckland hydronic and pool heating specialists.

Figures are manufacturer data and subject to change without notice. Champion Heating Ltd is an independent supplier and installer; brand names identify the products we supply.

0800 HEAT 4 U

0800 432 848 · 09 424 0424

info@championheating.co.nz · championheating.co.nz